


# SEELEVEL™ GAUGES

## Marine Tank Monitor



The premium monitor, with superior reliability.

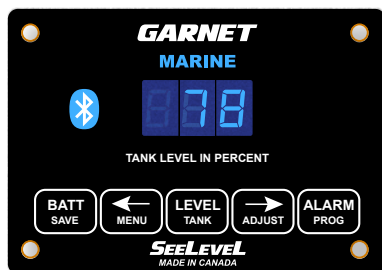

Monitor up to 7 tanks

High or low level alarms

Eliminate the guesswork

## Designed with you in mind

### Precision accuracy

The SEELEVEL™ tank monitor provides percentage of full, accurate tank measurement readouts. These readouts are accurate within 3/8 of an inch.

### Reliable external sensors

Our trouble-free water resistant senders adhere externally to the holding tanks eliminating sewage build-up on the sensors.

### Easy to install

Two wires connect to your existing system wires and function on a common bus system. Accessible tanks are easy to retrofit.

### Customize to fit your tanks

The senders are designed to be easily shortened or two can be combined to accommodate almost any holding tank shape or size.

Printed in Canada

### Manufactured & Distributed by:

Garnet Instruments Ltd. P: 780-467-1010  
286 Kaska Road, Sherwood Park TF: 1-800-617-7384  
Alberta, Canada T8A 4G7

**GARNET**  
garnetmarine.com


# Features

- The SEELEVEL™ series marine tank monitor is a water-resistant gauge that monitors up to seven holding tanks aboard your marine vessel.
- Percentage full measurements are displayed on a bright adjustable LED.
- *Bluetooth*® enabled, the monitor allows you to conveniently view tank levels and battery voltage on your mobile device all within range of your marine vessel. You can also customize tank names for easy identification.
- Aside from *Bluetooth*® capabilities, additional displays can be added to provide your tank monitor levels from multiple locations on board.
- Sender panels adhere externally to the tanks, reducing fouling or false readings due to sewage or material buildup within the tank.
- Once the senders are in place, you can setup each tank with its own low or high level alarm to notify you if, for example, your black tank is too high or if your fresh water level is too low. Tank alarms can be silenced until you attend to your tanks and alarms will automatically be reset.
- Different external alarm indicators can be also used such as lights or sounders.
- Easy push button operation helps you identify levels quickly when filling or draining is required, as well as providing you with important diagnostic information.

Don't just  
***SEE*** the ***LEVEL***,  
know the level!

# How it Works

The monitor displays the tank level in percent full, on a large 3-digit LED display.




Level is calculated by the system's microprocessor.

Receiving segments detect the difference between air and fluid.

A small signal indicates the segment is in air.

A medium signal indicates the segment is partially covered by water.

A large signal indicates the segment is covered by water.

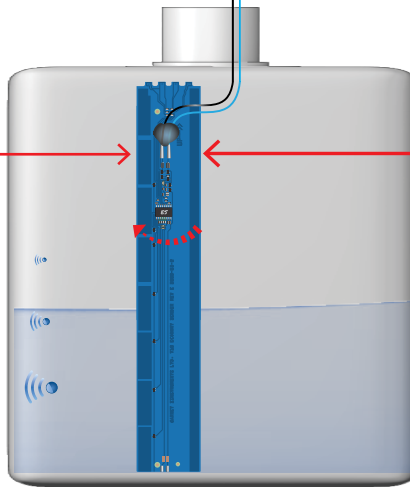



The vertical transmit strip sends out a radio frequency signal.

Senders are installed on the outside of the tank using high strength adhesive. They are never fouled by sewage.

The ES sender is accurate to 3/8" (1 cm)

**Install it yourself  
or contact your local dealer.**

# Last gauge you'll ever need!

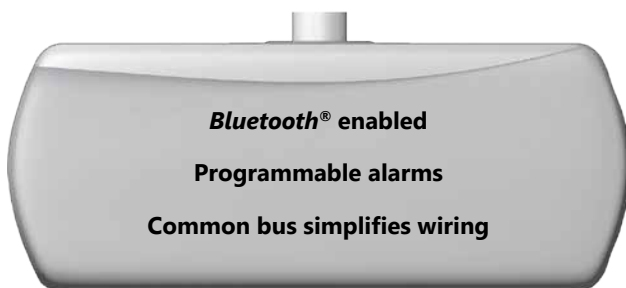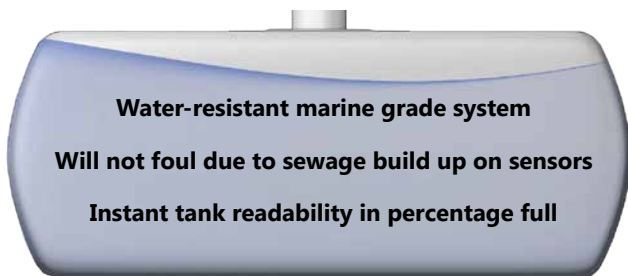

Printed in Canada

## Manufactured & Distributed by:

Garnet Instruments Ltd. P: 780-467-1010  
286 Kaska Road, Sherwood Park TF: 1-800-617-7384  
Alberta, Canada T8A 4G7

**GARNET**  
garnetmarine.com